

SB12-55 AGM VRLA
12V – 55AH

General Features:

- Designed floating charging service life: 10 years (25°C)
- Sealed and maintenance free operation
- Safety valve installation for explosion proof
- Low self-discharge characteristic
- Wide operating temperature range from 0°C~40°C
- Lead Aluminium calcium Tin alloy high energy, prevent corrosion



Design Life
10 Years



Low Internal
Resistance



High Current
Performance



Fast
Charging



Recyclable
(Pb)

Applications:

Uninterruptible Power Supply (UPS)
Telecom Stations and Power Station


Medical Equipment's
Fire Alarm and Security Systems

DC Power Supply
Emergency Lighting

Physical Specifications:

Nominal Voltage	Nominal Capacity (10HR)	Dimensions				Weight	Internal Resistance (In full charge status)	Standard Terminals
		Length	Width	Height	Total Height			
12V	55AH	230mm	138mm	211mm	216mm	Approx 16.3kg (35.86lbs)	≈6.9 mΩ	T25 (Standard)

Dimensions:

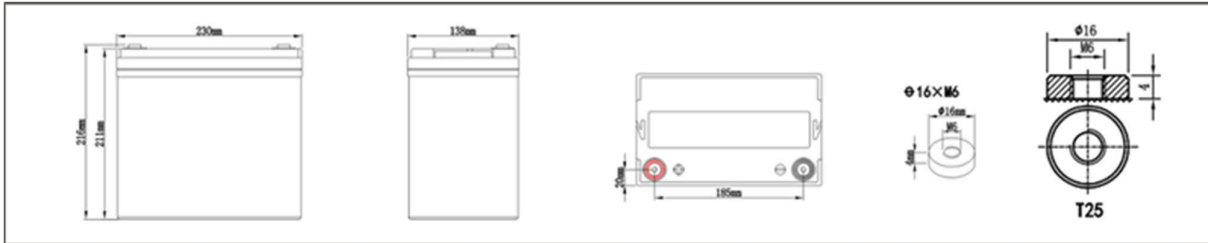

Constant Voltage Discharge:







Rated Capacity	
20 hour rate (2.75A)	58.4AH
10 hour rate (5.5A)	55.5AH
5 hour rate (9.35A)	47.1AH
3 hour rate (13.75A)	41.6AH
1 hour rate (33.0A)	33.3AH
Capacity affected by Temperature	
40°C(104°F)	103%
25°C(77°F)	100%
0°C(32°F)	86%

Cycle Application
1. Limit initial current less than 13.75A.
2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77°F).
3. Hold at 14.1V to 14.4V until current drop to under 0.33A for at least 3 hours.
4. Temperature compensation coefficient of charging voltage is -30mV/°C.
Standby Service
1. Hold battery across constant voltage source of 13.6 to 13.8 volts with current limit 13.75A continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charge status.
2. Temperature compensation coefficient of charging voltage is -18mV/°C.

Battery Discharge Table:

End Voltage (V)	Minutes (M)				Hours (H)							
	10	15	30	45	1	1.5	2	3	5	8	10	20
Constant Current Discharge Data Sheet (@25°C) Unit: A												
1.60	135	107	60	51.5	35.0	27.8	23.5	14.4	10.06	6.89	5.79	3.01
1.65	129	102	58	50.5	34.4	27.3	22.9	14.2	9.84	6.78	5.73	2.98
1.70	123	97	55	48.5	33.3	26.7	22.3	13.9	9.62	6.67	5.67	2.95
1.75	117	92	52	46.5	32.8	26.2	21.8	13.6	9.44	6.50	5.62	2.92
1.80	111	88	49	45.5	32.2	25.6	21.3	13.3	9.17	6.39	5.56	2.89
Constant Power Discharge Data Sheet (@25°C) Unit: W												
1.60	251.33	208.17	129.00	90.17	75.00	54.83	41.00	30.67	19.67	15.00	11.57	6.22
1.65	239.33	198.33	122.67	87.17	73.33	53.33	40.00	29.83	19.17	14.67	11.45	6.17
1.70	228.00	188.83	116.83	84.33	71.50	52.17	39.00	29.17	18.83	14.33	11.33	6.10
1.75	217.17	180.00	111.33	81.50	69.67	50.83	38.00	28.33	18.33	14.17	11.23	6.03
1.80	206.67	171.33	106.00	78.83	68.00	49.67	37.17	27.67	17.83	13.83	11.12	5.98

Performance Characteristic:

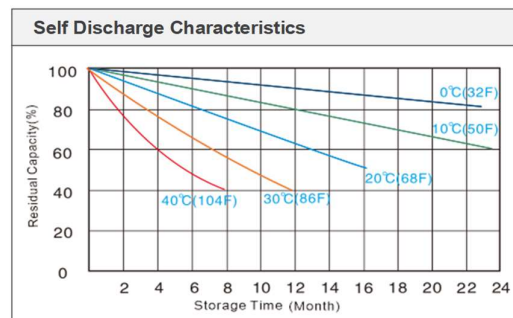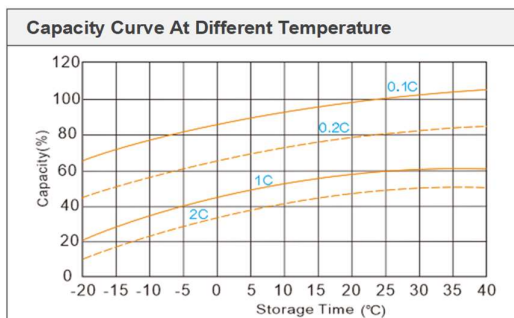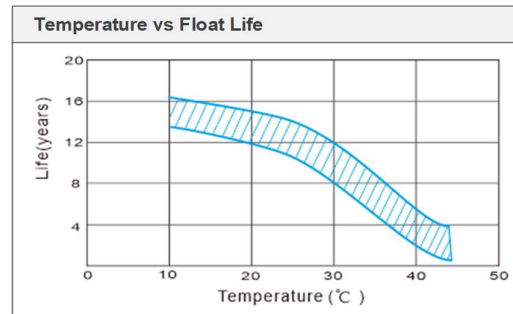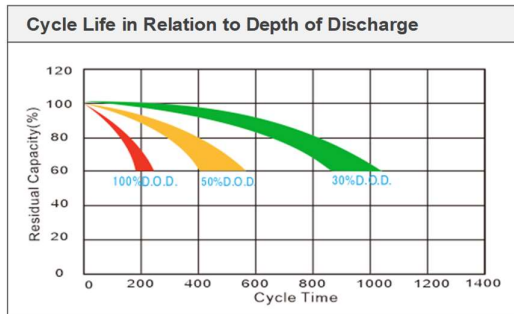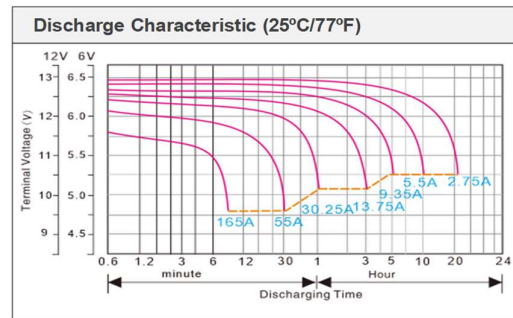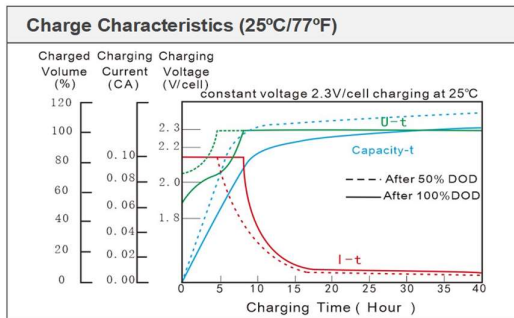

Note:

The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfation. Above Information is subject to change. For further queries, please contact info@swiftbatteries.com

